




응축기 / 공냉식 凝縮器 / 空冷式
Air cooled type / Fin & Tube / "V" model

DCV

■ 응축온도 : 50℃
Condensing temperature



Inner grooved tube

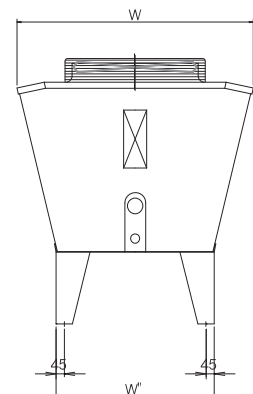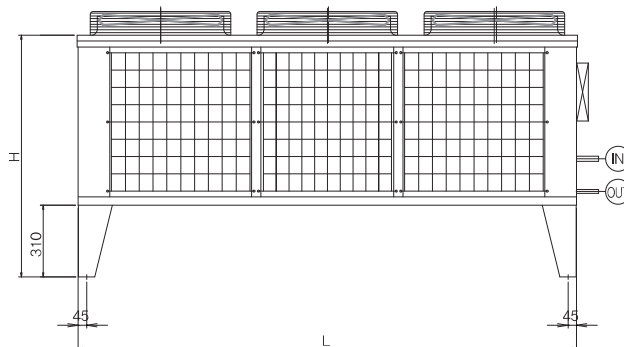

MODEL		DCV-030	DCV-050	DCV-075	DCV-100	DCV-150	DCV-200	DCV-250	DCV-300	DCV-400	DCV-500
구분											
전열면적 Surface Area(m ²)		24	36	55	74	120	170	227	279	326	397
응축열량 Capacity(kcal/h)		10,000	15,100	23,000	31,080	50,500	71,600	95,400	117,400	136,700	166,700
전동기 Motor(kW×극)		0.1×8P	0.2×8P	0.1×8P	0.2×8P	0.4×6P	0.4×6P	0.4×6P	0.75×6P	0.75×8P	0.75×8P
송풍기 Fan(Ømm×EA)		500×1	600×1	500×2	600×2	600×2	600×3	600×3	650×3	750×3	750×4
풍 량 Air Volume(m ³ /min)		90	150	180	300	300	450	450	510	600	800
접속관경 Nozzles inch(mm)	IN	7/8(22.22)	7/8(22.22)	1 1/8(28.6)	1 1/8(28.6)	1 3/8(34.9)	1 3/8(34.9)	1 3/8(34.9)	1 3/8(34.9)	1 5/8(41.3)	1 5/8(41.3)
	OUT	1/2(12.7)	5/8(15.88)	3/4(19.05)	3/4(19.05)	7/8(22.22)	7/8(22.22)	7/8(22.22)	1 1/8(28.6)	1 1/8(28.6)	1 1/8(28.6)
외형크기 Dimensions(mm)	L	770	870	1320	1617	1596	2150	2150	2580	2880	3640
	H	875	1080	1010	1030	1040	1045	1045	1045	1300	1300
	W	762	830	830	830	928	1020	1020	1070	1165	1165
	W'	513	496	535	510	630	715	715	765	760	740
중 량 Weight(kg)		70	90	105	135	160	180	205	270	550	610

※규격 및 사양은 제품의 개선을 위하여 예고 없이 변경될 수 있습니다. All technical modifications reserver without engagement.