



응축기 / 공냉식 / 일체형 凝縮器 / 空冷式 / 一體形
Air cooled type / Fin & Tube / Package

DCS

■ 응축온도 : 50℃
Condensing temperature



Inner grooved tube

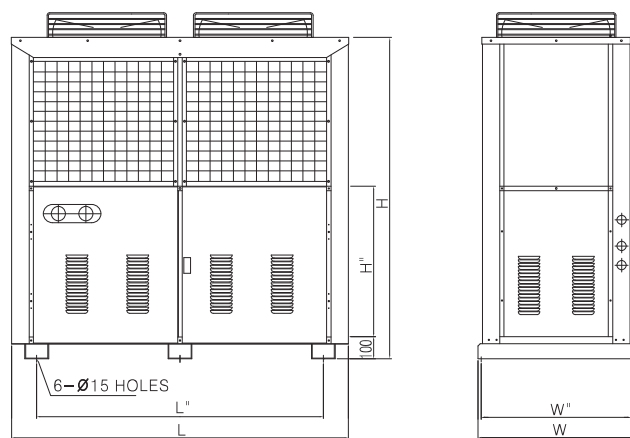

MODEL		DCS-030	DCS-050	DCS-075	DCS-100
구분					
전열면적 Surface Area(m ²)		27	47	69	76
응축열량 Capacity(kcal/h)		11,200	19,800	29,100	31,800
전동기 Motor(kW×극)		0.1×6P	0.1×6P	0.2×6P	0.2×6P
송풍기 Fan(Ømm×EA)		400×2	400×2	500×2	500×2
풍 량 Air Volume(m ³ /min)		110	110	180	180
접속관경 Nozzles inch(mm)	IN	3/4(19.05)	7/8(22.22)	1 1/8(28.6)	1 1/8(28.6)
	OUT	5/8(15.88)	5/8(15.88)	3/4(19.05)	3/4(19.05)
외형크기 Dimensions(mm)	L	1100	1320	1550	1550
	L"	900	1090	1320	1320
	W	520	680	720	720
	W"	490	650	690	690
	H	1250	1400	1500	1550
	H"	620	765	950	990
중 량 Weight(kg)		110	120	150	160

※규격 및 사양은 제품의 개선을 위하여 예고 없이 변경될 수 있습니다. All technical modifications reserver without engagement.



응축기 / 공냉식 / 일체형 凝縮器 / 空冷式 / 一體形
Air cooled type / Fin & Tube / Package

DCS

■ 응축온도 : 50℃
Condensing temperature



Inner grooved tube

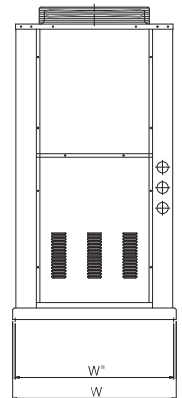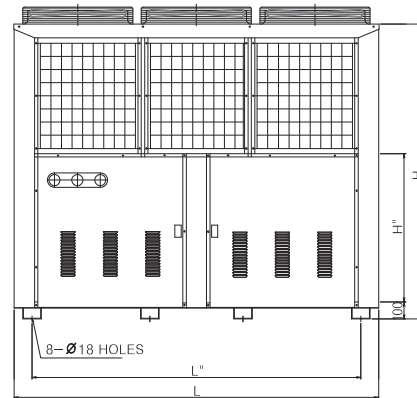

MODEL		DCS-150	DCS-200	DCS-250	DCS-300	DCS-400	DCS-500
구분							
전열면적 Surface Area(m ²)		120	170	227	279	326	397
응축열량 Capacity(kcal/h)		50,500	71,600	95,400	117,400	136,700	166,700
전동기 Motor(kW×극)		0.4×6P	0.4×6P	0.4×6P	0.75×6P	0.75×8P	0.75×8P
송풍기 Fan(Ømm×EA)		600×2	600×3	600×3	650×3	750×3	750×4
풍 량 Air Volume(m ³ /min)		300	450	450	510	600	800
접속관경 Nozzles inch(mm)	IN	1 3/8(34.9)	1 3/8(34.9)	1 3/8(34.9)	1 3/8(34.9)	1 5/8(41.3)	1 5/8(41.3)
	OUT	7/8(22.22)	7/8(22.22)	7/8(22.22)	1 1/8(28.6)	1 1/8(28.6)	1 1/8(28.6)
외형크기 Dimensions(mm)	L	1600	2150	2150	2580	2860	3630
	L''	1360	1940	1940	2110	2500	3030
	W	965	965	965	990	1150	1150
	W''	935	935	935	960	1100	1100
	H	1840	1840	1840	1790	2140	2296
	H''	935	935	935	935	950	990
중 량 Weight(kg)		265	336	354	420	472	580

※상기 표에 적용되는 냉동기의 동력은 다음과 같습니다.

구분	MODEL	DCS-030	DCS-050	DCS-075	DCS-100	DCS-150	DCS-200	DCS-250	DCS-300	DCS-400	DCS-500
공조용		2HP	3HP	5HP	7.5HP	10HP	15HP	20HP	25HP	40HP	40HP
냉장용		3HP	5HP	7.5HP	10HP	15HP	20HP	25HP	30HP	40HP	50HP
냉동용		3HP	5HP	7.5HP	10HP	15HP	20HP	25HP	30HP	40HP	50HP

〈기준〉
냉매 : R-22
압축기 : 반밀폐형
공조 : 20~25℃
냉장 : -5~-10℃
냉동 : -10℃이하

※규격 및 사양은 제품의 개선을 위하여 예고 없이 변경될 수 있습니다. All technical modifications reserver without engagement.