



응축기 / 공냉식 / 저소음형 凝縮器 / 空冷式 / 低騒音型
Air cooled type / Fin & Tube / "V" model / Low noise

DCVLT

■ 응축온도 : 50℃
Condensing temperature



Inner grooved tube

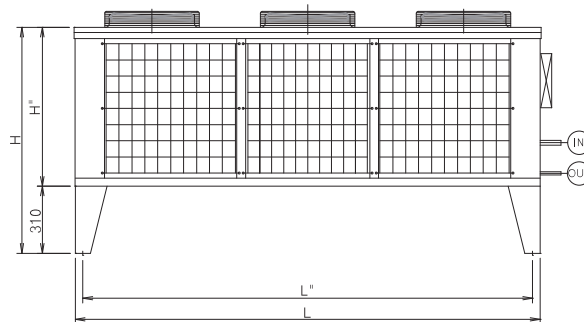

MODEL		DCVLT-150	DCVLT-200	DCVLT-250	DCVLT-300	DCVLT-400	DCVLT-500
구분							
전열면적 Surface Area(m ²)		120	170	227	279	326	397
응축열량 Capacity(kcal/h)		50,500	71,600	95,400	117,400	136,700	166,700
전동기 Motor(kW×극)		0.1×6P	0.1×6P	0.1×6P	0.1×6P	0.1×6P	0.2×6P
송풍기 Fan(Ømm×EA)		400×6	400×6	400×6	400×8	400×10	450×12
풍 량 Air Volume(m ³ /min)		330	330	330	440	550	780
접속관경 Nozzles inch (mm)	IN	1 3/8(34.9)	1 3/8(34.9)	1 3/8(34.9)	1 3/8(34.9)	1 5/8(41.3)	1 5/8(41.3)
	OUT	7/8(22.22)	7/8(22.22)	7/8(22.22)	1 1/8(28.6)	1 1/8(28.6)	1 1/8(28.6)
외형크기 Dimensions(mm)	L	1600	2150	2150	2580	2880	3640
	L''	1510	2060	2060	2490	2790	3550
	W	902	1015	1015	1015	880	1140
	W''	812	925	925	925	790	1050
	H	1045	1045	1045	1045	1300	1300
	H''	735	735	735	735	950	990
중 량 Weight(kg)		190	215	245	320	660	730

※규격 및 사양은 제품의 개선을 위하여 예고 없이 변경될 수 있습니다. All technical modifications reserver without engagement.