



유니트쿨러 / 천장형 空氣冷却器 / 天障形

Ceiling hanger type / Electric heater defrost / 전기제상 電氣除霜

DUP-E



Inner grooved tube

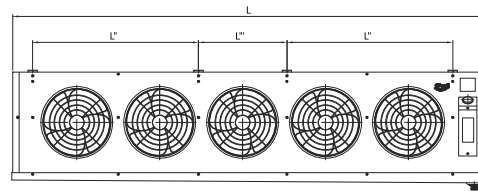

♠ PP : 33mm X 38.1mm, 1/2" 동관을 사용합니다. Copper tube 1/2" use.

MODEL		DUP-020E		DUP-030E		DUP-050E		DUP-075E		DUP-100E		DUP-150E		DUP-180E		DUP200		
구분																		
고내온도 Room temp.(℃)		-10	-25	-10	-25	-10	-25	-10	-25	-10	-25	-10	-25	-10	-25	-10	-25	
흰 피치 Fin pitch(mm)		6.5	8.5	6.5	8.5	6.5	8.5	6.5	8.5	6.5	8.5	6.5	8.5	6.5	8.5	6.5	8.5	
전열면적 Surface Area(m ²)		5	4	7	6	15	12	22	17	29	23	44	35	66	65	77	83	
냉각능력 Cooling capacity (kcal/h)	TD 5℃	933	672	1,244	897	2,490	1,796	3,734	2,693	4,981	3,592	7,471	5,389	11,175	10,035	13,038	12,899	
	TD 7℃	1,306	941	1,742	1,256	3,486	2,515	5,228	3,771	6,973	5,030	10,460	7,545	15,650	14,045	18,253	18,058	
	TD 10℃	1,866	1,345	2,488	1,794	4,981	3,592	7,469	5,287	9,962	7,185	14,943	10,778	22,358	20,065	26,076	25,798	
전동기 Motor(kW×극)		0.1×6P		0.1×6P		0.1×6P		0.1×6P		0.1×6P		0.1×6P		0.1×6P		0.1×6P		
송풍기 Fan(Ømm×EA)		350×1		350×1		350×2		350×3		350×4		350×4		350×5		350×5	350×6	
풍 량 Air Volume(m ³ /min)		35		35		70		105		140		140		175		175	210	
전 원 Power		3Ø, 380V, 60Hz																
제상히터 Defrost heater		0.6kW×2		0.6kW×2		1.1kW×2		1.5kW×2		2.2kW×2		2.2kW×5		2.2kW×5		2.2kW×5	2.4kW×5	
드레인히터 Drain heater		0.8kW×1		0.8kW×1		1.3kW×1		1.5kW×1		2.4kW×1		2.4kW×1		2.2kW×1	2.4kW×1	2.2kW×1	2.4kW×1	
팬가이드히터 Fan guide heater		0.4kW×1		0.4kW×1		0.4kW×2		0.4kW×3		0.4kW×4		0.4kW×4		0.3kW×5		0.3kW×5	0.3kW×6	
접속관경 Nozzles inch(mm)	냉매입구 Inlet	1/2(12.7)		1/2(12.7)		5/8(15.88)		5/8(15.88)		3/4(19.05)		3/4(19.05)		7/8(22.22)		7/8(22.22)		
	냉매출구 Outlet	3/4(19.05)		3/4(19.05)		1 1/8(28.6)		1 3/8(34.9)		1 3/8(34.9)		1 3/8(34.9)		1 3/8(34.9) 1 5/8(41.3)		1 3/8(34.9)	1 5/8(41.3)	
	배수 Water drain	25A		25A		25A		25A		25A		25A		32A		32A		
외형크기 Dimensions(mm)		L	745		745		1195		1675		2095		2095		2570	2720	2570	3020
		L"/L'''	480		480		930		1380		1830		1830		900/480	950/530	900/480	900/930
		W	397		397		397		397		397		427		470	470	470	470
		W''	357		357		357		357		357		387		430	430	430	430
		H	460		460		460		460		460		525		525	600	600	680
중 량 Weight(kg)		35		40		60		90		110		130		155	165	180	195	

※표준사양 이외 전원은 주문생산합니다. Special Voltages available upon request

※규격 및 사양은 제품의 개선을 위하여 예고 없이 변경될 수 있습니다. All technical modifications reserver without engagement.