



유니트쿨러 / 소형 空氣冷却器 / 小形

Small type / Electric heater defrost / 전기제상 電氣除霜

DUR



Inner grooved tube

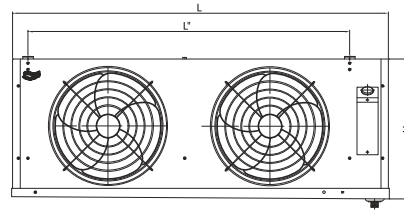

♣ PP : 33mm X 38.1mm, 1/2" 동관을 사용합니다. Copper tube 1/2" use.

MODEL		DUR-010E			DUR-015E			DUR-020E			DUR-030E			
구분														
고내온도 Room temp.(℃)		0	-10	-25	0	-10	-25	0	-10	-25	0	-10	-25	
휀 피치 Fin pitch(mm)		4.5	6.5	8.5	4.5	6.5	8.5	4.5	6.5	8.5	4.5	6.5	8.5	
전열면적 Surface Area(m ²)		5	4	3	6	4	3	9	6	5	13	9	7	
냉각능력 Cooling capacity (kcal/h)	TD 5℃	1,010	614	443	1,182	719	518	1,774	1,078	778	2,566	1,561	1,125	
	TD 7℃	1,414	859	621	1,655	1,007	725	2,484	1,509	1,089	3,592	2,185	1,575	
	TD 10℃	2,020	1,227	887	2,364	1,438	1,035	3,548	2,156	1,556	5,132	3,672	2,251	
전동기 Motor(W×극)		19×4P			19×4P			19×4P			19×4P			
송풍기 Fan(Ømm×EA)		250×1			250×2			250×2			250×3			
풍 량 Air Volume(m ³ /min)		20			40			40			60			
전 원 Power		1 Ø, 220V, 60Hz												
제상히터 Defrost heater		0.7kW×1ea			1.1kW×1ea			1.1kW×1ea			1.5kW×1ea			
드레인히터 Drain heater		0.7kW×1ea			1.0kW×1ea			1.0kW×1ea			1.4kW×1ea			
접속관경 Nozzles inch(mm)	냉매입구 Inlet	1/2(12.7)			1/2(12.7)			1/2(12.7)			1/2(12.7)			
	냉매출구 Outlet	1/2(12.7)			5/8(15.88)			5/8(15.88)			5/8(15.88)			
	배수 Water drain	25A			25A			25A			25A			
외형크기 Dimensions(mm)		L	650			930			930			1215		
		L"	400			680			680			970		
		W	340			340			340			340		
		W"	300			300			300			300		
		H	375			375			375			375		
중 량 Weight(kg)		22			25			27			3			

※규격 및 사양은 제품의 개선을 위하여 예고 없이 변경될 수 있습니다. All technical modifications reserver without engagement.