
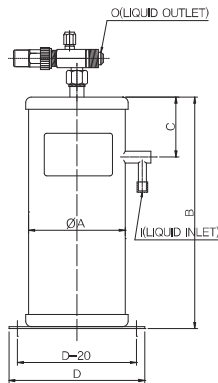




수액기 / 입형 / 소용량 受液器 / 立形 / 小容量  
Vertical type

# DHRV

- 내압시험압력 : 2.42 MPa (R22)  
Pressure Test
- 설계압력 : 2.2 MPa (R22)  
Design pressure
- 가용전 적용시의 용융온도 : 72°C  
Melting temperature of fusible plug



(DHRV-020~DHRV-050)

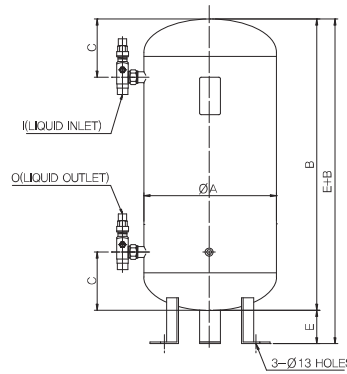

(DHRV-075~DHRV-300)

구분	MODEL	DHRV-020	DHRV-030	DHRV-050	DHRV-075	DHRV-100	DHRV-150	DHRV-200	DHRV-300
용량 Receiving volume(Liter)		2.3	3	5.5	9.2	15	22.2	31.8	46.5
외형크기 Dimensions(mm)	A	114.3	114.3	165.2	216.3	216.3	267.4	318.5	318.5
	B	270	350	350	350	500	500	500	700
	C	55	100	75	90	100	120	130	140
	D	160	160	200	161.7	161.7	207.9	254	254
	E	-	-	-	70	70	70	80	80
접속관경 Nozzles inch(mm)	I	3/8(9.53)	3/8(9.53)	1/2(12.7)	5/8(15.88)	5/8(15.88)	7/8(22.22)	7/8(22.22)	7/8(22.22)
	O	3/8(9.53)	3/8(9.53)	1/2(12.7)	5/8(15.88)	5/8(15.88)	7/8(22.22)	7/8(22.22)	7/8(22.22)
중량 Weight(kg)		5	6	12	15	22	35	46	65

※규격 및 사양은 제품의 개선을 위하여 예고 없이 변경될 수 있습니다. All technical modifications reserver without engagement.