



응축기 / 공냉식 / 밀폐형 凝縮器 / 空冷式 / 密閉型
Air cooled type / Fin & Tube / "A", "M" model

DCA DCM


■ 응축온도 : 50℃
Condensing temperature



Inner grooved tube

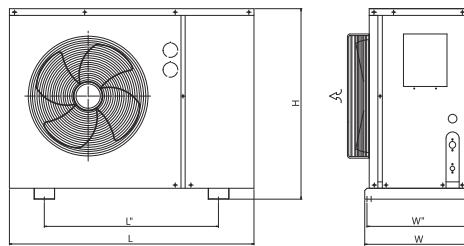

(DCAH-020~040 적용)
(DCA-050 적용)

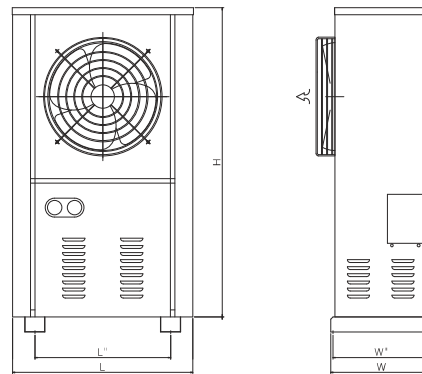

(DCM-050 적용)

MODEL		DCAH-020	DCAH-030	DCAH-040	DCA-050	DCM-050
구분						
전열면적	Surface Area(m ²)	16	24	32	41	39
응축열량	Capacity(kcal/h)	6,700	10,000	13,400	17,000	16,500
전동기	Motor(kW×극)	0.1×6P	0.1×6P	0.1×6P	0.2×6P	0.2×6P
송풍기	Fan(∅mm×EA)	400×1	400×1	400×1	500×1	500×1
풍량	Air Volume(m ³ /min)	55	55	55	90	90
접속관경 Nozzles inch(mm)	IN	1/2(12.7)	1/2(12.7)	5/8(15.88)	5/8(15.88)	7/8(22.22)
	OUT	1/2(12.7)	1/2(12.7)	1/2(12.7)	1/2(12.7)	5/8(15.88)
외형크기 Dimensions(mm)	L	1020	1020	1020	1120	810
	L"	700	700	700	800	590
	W	440	440	440	490	450
	W"	420	420	420	470	430
	H	810	810	810	865	1455
중량	Weight(kg)	37	40	43	70	80

※규격 및 사양은 제품의 개선을 위하여 예고 없이 변경될 수 있습니다. All technical modifications reserver without engagement.